


⚠ Important Safety Notice ⚠

It is the responsibility of the person installing the electrical equipment to ensure that the installation meets the requirements of the IET wiring regulations and is therefore 'fit for purpose'. Factors such as correct selection of components, cable sizing, protective devices and Earth bonding are all critical and should be checked prior to full testing and power-up. Any other regulations applicable to the equipment being installed such as the Machinery Directive and current health and safety legislation must also be adhered to.

Terminals, including factory fitted, should be checked periodically to ensure correct tightness.



Key Operated Selector Switches	
Approval	UL
Mounting Hole Diameter	Ø22.5mm
Function Type	2/3 position Latched or Spring Ret.
Contact	NO + NC, 2NO & 2NC
Type	Non-illuminated
Colour	Black
Rated Operational Voltage	230V AC
Rated Operational Current	6A
Rated Insulation Voltage	600V AC
HV Test	2.5kV for 60 seconds
Insulation Resistance	>50MΩ at 500V DC
Contact Resistance	<220mV
Electrical Endurance	500,000
Mechanical Endurance	1,000,000
Operating Temperature	-30°C to 60°C
Storage Temperature	-25°C to 70°C
Operating Force	Maximum 8N
Ingress Protection (panel mount)	IP65
Terminal Protection	IP20
Maximum Terminal Capacity	2 x 2.5mm ²
Maximum Tightening Torque	0.5Nm

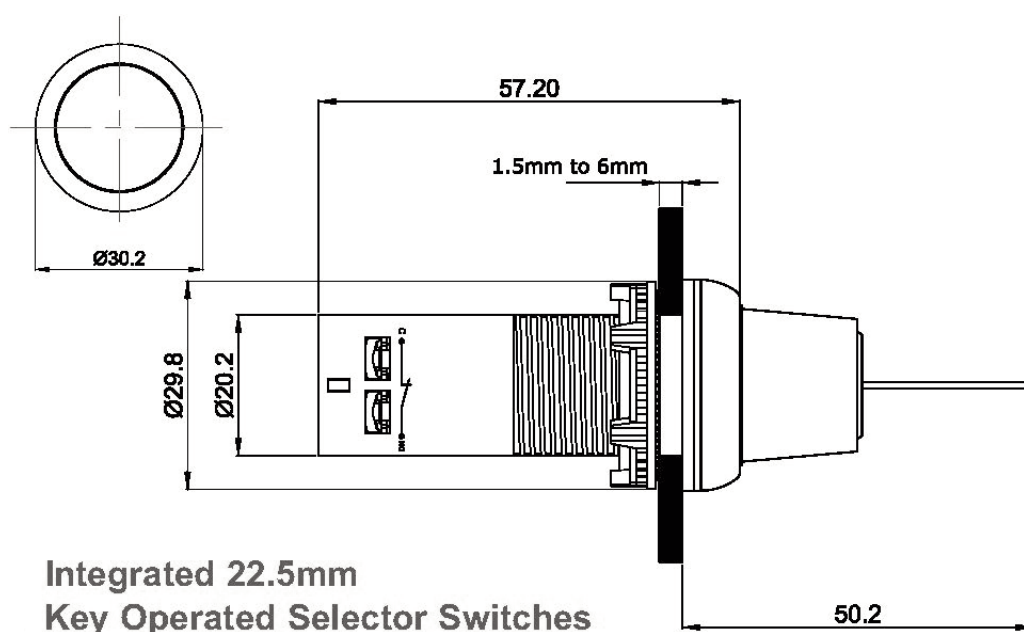

**Integrated 22.5mm
Key Operated Selector Switches**