

This document must be retained for future reference.

It is the responsibility of the person installing the electrical equipment to ensure that the installation meets the requirements of the IET wiring regulations and is therefore 'fit for purpose'. Factors such as correct selection of components, cable sizing, protective devices and Earth bonding are all critical and should be checked prior to full testing and power-up. Any other regulations applicable to the equipment being installed such as the Machinery Directive and current health and safety legislation must also be adhered to.

All connections (including factory made) must be checked for the correct tightness prior to commissioning of the electrical installation. All connections should also be inspected periodically to ensure correct tightness.


DO NOT USE POWER TOOLS ON THESE PRODUCTS



ISSW1255N
IP67 125A Weather Proof Industrial Surface Socket | 125A 415V 3P + N + E

Description

- IP67 rated weatherproof industrial surface socket
- Conforms to European/ International Standards EN/IEC 60309-2
- Spring-return lid with twist-lock ring
- Operating temperature between -25 °C to +40 °C
- Cable entries: Top PG42 (Threaded) and Bottom 2x 40mm Diameter
- Supplied with PG42 Cable Gland

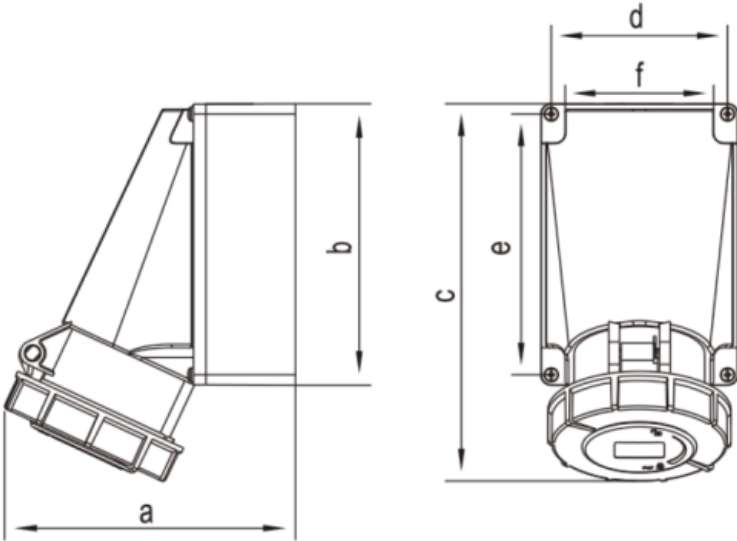

Part Number	Amps	Colour & Voltage	Poles	Protection Degree	a (mm)	b (mm)	c (mm)	d (mm)	e (mm)	f (mm)	Terminal Capacity	Recommended Terminal Torque
ISSW1255N	125A	Red 415V	3P + N + E	IP67	220	260	335	106	158	118	16-50 mm ²	3.0Nm