

This document must be retained for future reference.

It is the responsibility of the person installing the electrical equipment to ensure that the installation meets the requirements of the IET wiring regulations and is therefore 'fit for purpose'. Factors such as correct selection of components, cable sizing, protective devices and Earth bonding are all critical and should be checked prior to full testing and power-up. Any other regulations applicable to the equipment being installed such as the Machinery Directive and current health and safety legislation must also be adhered to.

All connections (including factory made) must be checked for the correct tightness prior to commissioning of the electrical installation. All connections should also be inspected periodically to ensure correct tightness.

DO NOT USE POWER TOOLS ON THESE PRODUCTS




## BA9LED1B/1F/1P/3B/3F/3P/4B/4F/4P/5B/5F/5P/6B/6F/6P

- Bayonet cap LED lamp
- Low maintenance due to long life and high reliability
- Lasts 500 times longer than incandescent lamps



### Part Number Breakdown

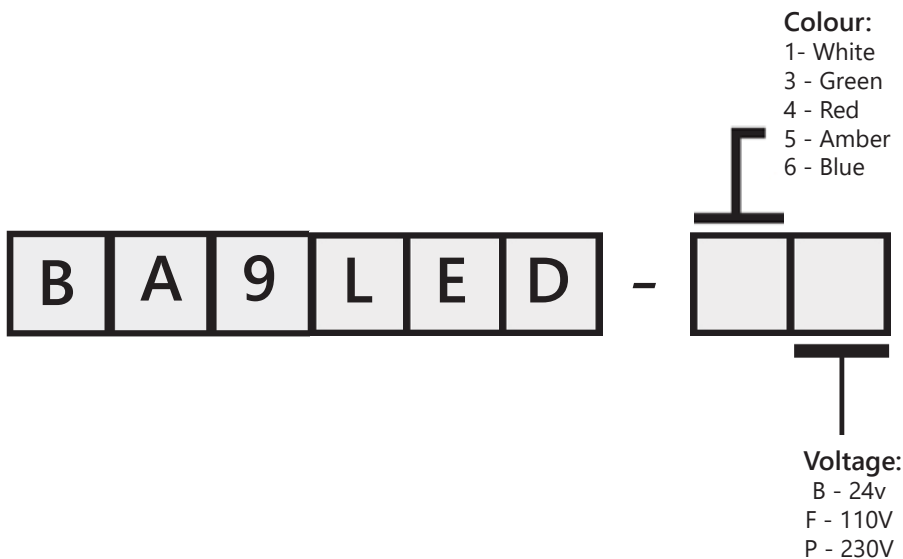

Diameter	10mm
Overall Length	23mm
Wavelength Green (gallium phosphide)	5600Å
Wavelength Yellow (gallium arsenide phosphide)	5800Å
Wavelength Amber (gallium arsenide phosphide)	6300Å
Wavelength Red (gallium arsenide phosphide)	6600Å
Degree of protection	IP55
Operating temperature	-25°C to +55°C
Life expectancy	30000 hours