

ARCA 304015

FIBOX
Enclosing innovations



Sample image

Order symbol : ARCA 304015

Product nr : 8120022

UL Code : UL508A

Description : Cabinet, PC




Remarks : Grey cover, 2-point locking, hinges on the short side

EAN : 6418074079336

El. number :

- Finland : 3423119
- Denmark : 8212091207
- Sweden : 2500111

Including : Cabinet base. door with PUR gasket. mounting plate. screws for mounting plate. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

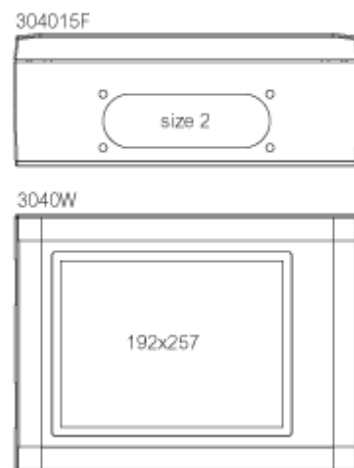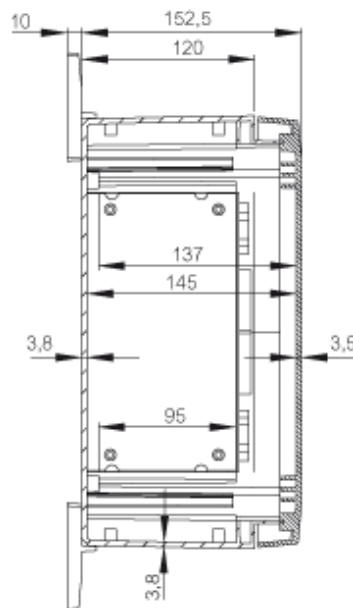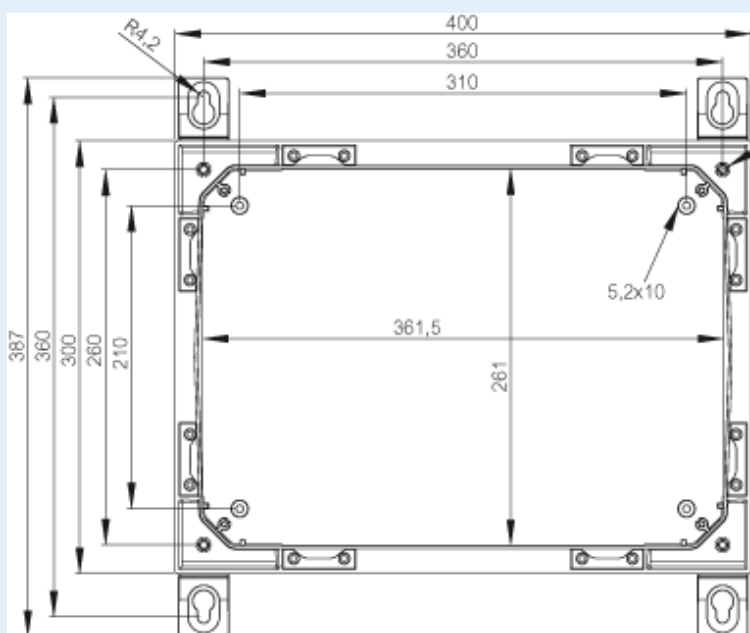

Dimensions :	Height	Width	Depth
mm :	300	400	150
inch :	11.81	15.75	5.91

Materials :

Material : Polycarbonate

Accessories :

DRS ARCA 304015	DIN rail frame set (385 x 285 x 35)
DSP ARCA HRS	Door stopper ARCA, horizontal, right, small (15 x 104 x 16)
DSP ARCA HLS	Door stopper ARCA, horizontal, left, small (15 x 104 x 16)
IDS ARCA 3040	Inner door set

Base colour :	RAL_7035
Cover colour :	RAL 7035 -light grey
Gasket material :	Polyurethane

Temperatures :		
Temperature °C (continuous) :	-40 ... 80	
Temperature °F (continuous) :	-40 ... 175	

RCS ARCA 3040	Rain canopy set for size 3040 (30 x 400 x 20)
PMK ARCA 40	PoleMounting kit, for pole ø100-300mm (385 x 285 x 35)
MPP ARCA 3040	Mounting plate perforated (350x250x2 mm - 26x11 mm) (250 x 350 x 2)
MPMP ARCA 4030	Mounting plate multiperforated (350x250x2 mm - ø3.6 mm) (350 x 250 x 1.5)
MPS ARCA 4030	Mounting plate (350x250x2 mm) (350 x 250 x 2)
MPX ARCA 4030	Mounting plate (350x250 mm) (350 x 250 x 5)

Ratings :		
Ingress protection (EN 60529):	IP66;	
Impact Resistance (EN 62262):	IK10;	
electrical_insulation :	Totally insulated	
Halogen free (DIN/VDE 0472, Part 815) :	Yes	
UV resistance :	UL 746C	
Flammability Rating :	UL 94 5VA	
Glow Wire Test (IEC 695-2-1) °C :	960C	
UL Type	1, 4, 4X, 12, 13	

Certificates :		
Certificate FI 40467		