

ARCA 406021

FIBOX
Enclosing innovations



Sample image

Order symbol : ARCA 406021

Product nr : 8120026

UL Code : UL508A

Description : Cabinet, PC


Remarks : Grey cover, 2-point locking, hinges on the short side

EAN : 6418074079374

El. number :

- Finland : 3423124
- Denmark : 8212091249
- Sweden : 2500117

Including : Cabinet base. door with PUR gasket. mounting plate. screws for mounting plate. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

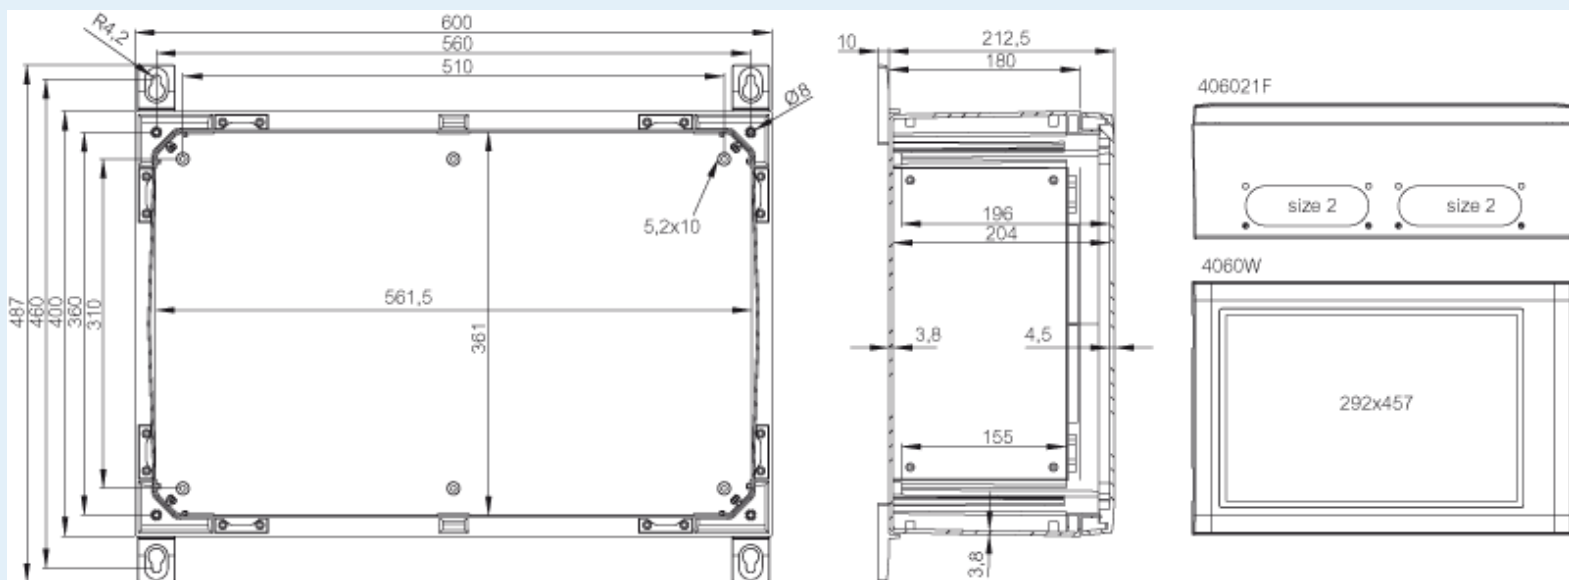

Dimensions :

	Height	Width	Depth
mm :	400	600	210
inch :	15.75	23.62	8.27

Materials :

Material :	Polycarbonate
Base colour :	RAL_7035

Accessories :

MPS ARCA 6040	Mounting plate (550x350x2 mm) (550 x 350 x 2)
PMK ARCA 60	PoleMounting kit, for pole ø100-300mm (585 x 385 x 35)
MPP ARCA 4060	Mounting plate perforated (550x350x2 mm - 26x11 mm) (350 x 550 x 2)
DSP ARCA HRS	Door stopper ARCA, horizontal, right, small (15 x 104 x 16)

Cover colour :	RAL 7035 -light grey
Gasket material :	Polyurethane

Temperatures :		
Temperature °C (continuous) :	-40 ... 80	
Temperature °F (continuous) :	-40 ... 175	

IDS ARCA 4060	Inner door set
DSP ARCA HLS	Door stopper ARCA, horizontal, left, small (15 x 104 x 16)
MPMP ARCA 6040	Mounting plate multiperforated (550x350x2 mm - ø3.6 mm) (550 x 350 x 1.5)
DRS ARCA 406021	DIN rail frame set (585 x 385 x 35)
MPX ARCA 6040	Mounting plate (550x350 mm) (550 x 350 x 5)
RCS ARCA 4060	Rain canopy set for size 4060 (30 x 600 x 20)

Ratings :		
Ingress protection (EN 60529):	IP66;	
Impact Resistance (EN 62262):	IK10;	
electrical_insulation :	Totally insulated	
Halogen free (DIN/VDE 0472, Part 815) :	Yes	
UV resistance :	UL 746C	
Flammability Rating :	UL 94 5VA	
Glow Wire Test (IEC 695-2-1) °C :	960C	
UL Type	1, 4, 4X, 12, 13	

Certificates :		
Certificate FI 40467		