

This document must be retained for future reference.

It is the responsibility of the person installing the electrical equipment to ensure that the installation meets the requirements of the IET wiring regulations and is therefore 'fit for purpose'. Factors such as correct selection of components, cable sizing, protective devices and Earth bonding are all critical and should be checked prior to full testing and power-up. Any other regulations applicable to the equipment being installed such as the Machinery Directive and current health and safety legislation must also be adhered to.

All connections (including factory made) must be checked for the correct tightness prior to commissioning of the electrical installation.
All connections should also be inspected periodically to ensure correct tightness.

DO NOT USE POWER TOOLS ON THESE PRODUCTS




LB100 - 1254PSTB - 3PSNSTB AC-22

4 Pole & 3 Pole + Switched Neutral Metal Clad Enclosed Switch Disconnectors

International/European Standard		IEC & EN 60947-1 and 3			
Data		Range	Units	LB1004PSTB LB1003PSNSTB	LB1254PSTB LB1253PSNSTB
Rated Operational Voltage Ue					
IEC & EN		Volts	V	690	690
UL		Volts	V	600	600
Main Switch: Isolating Voltage up to		Volts	V	750	750
Rated Impulse Withstand Voltage Uimp		Volts	kV	6	6
Rated Uninterrupted Current Iu		Amps	A	100	125
Rated Operational Current Ie					
IEC & EN	AC-22A	Up to 690V	A	100	125
	AC-21A	Up to 690V	A	100	125
	AC-1	Up to 690V	A	100	125
Rated Operational Power AC-23A (50-60Hz)					
IEC & EN	3 Phase	230(240)V	kW	45	55
		400(415)V	kW	55	75
		690V	kW	90	90
Rated Operational Power AC-3 (50-60Hz)					
IEC & EN	3 Phase	230(240)V	kW	37	45
		400(415)V	kW	45	55
		690V	kW	55	55
UL Power Rating					
DOL	3 Phase	120V	hp	7.5	7.5
		240V	hp	20	30
		480V	hp	30	40
		600V	hp	40	50
	1 Phase	120V	hp	3	3
		240V	hp	7.5	7.5
UL Short Circuit Ratings					
Fuse rating, class J		Amps	A	125	125
Fuse rating, class RK5		Amps	A	-	-
Rated Fused short circuit current		Amps	kA	10	10
Short Circuit Capacity (IEC)					
Max Fuse Size (Type gL)		Amps	A	125	125
Rated Fused Short Circuit Current		Amps	kA	30	30
Terminal Specification					
Single/ Multiple Strand Wire			Min-mm²	2.5	2.5
			Max-mm²	50	50
Fine Strand with Sleeve			Min-mm²	4	4
			Max-mm²	50	50
American Wire Gauge			AWG	1	1
Recommended Tightening Torque			Nm	2.5	2.5

LB100 - 1254PSTB - 3PSNSTB AC-22

4 Pole & 3 Pole + Switched Neutral Metal Clad Enclosed Switch Disconnectors

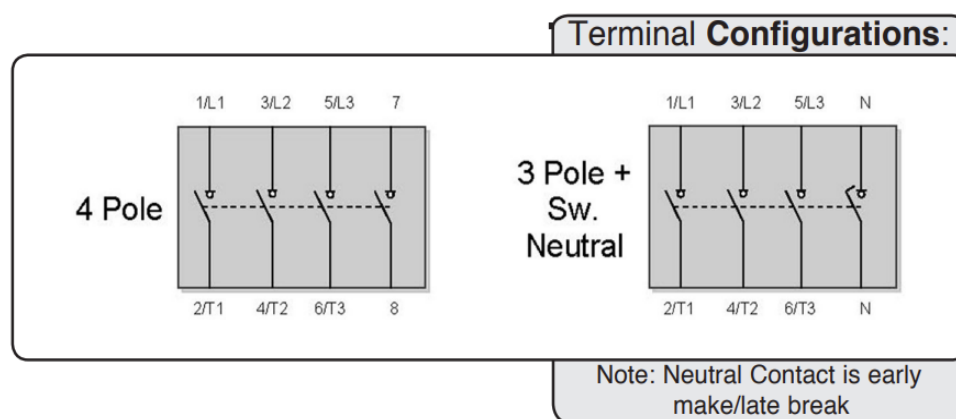

Enclosure Dimensions

