

# PC 95/60 HG



Sample image

**Order symbol :** PC 95/60 HG

**Product nr :** 6011331

**UL Name :** UL PC 95/60 HG

**Description :** Enclosure, PC


**Remarks :** High base, grey cover

**EAN :** 6418074054630

**El. number :**

- Finland : 3421364
- Denmark : 8212027721
- Sweden : 6011331

**Including :** Base with PUR gasket. screws for mounting plate/DIN-rail and cover with polyamide cover screws.

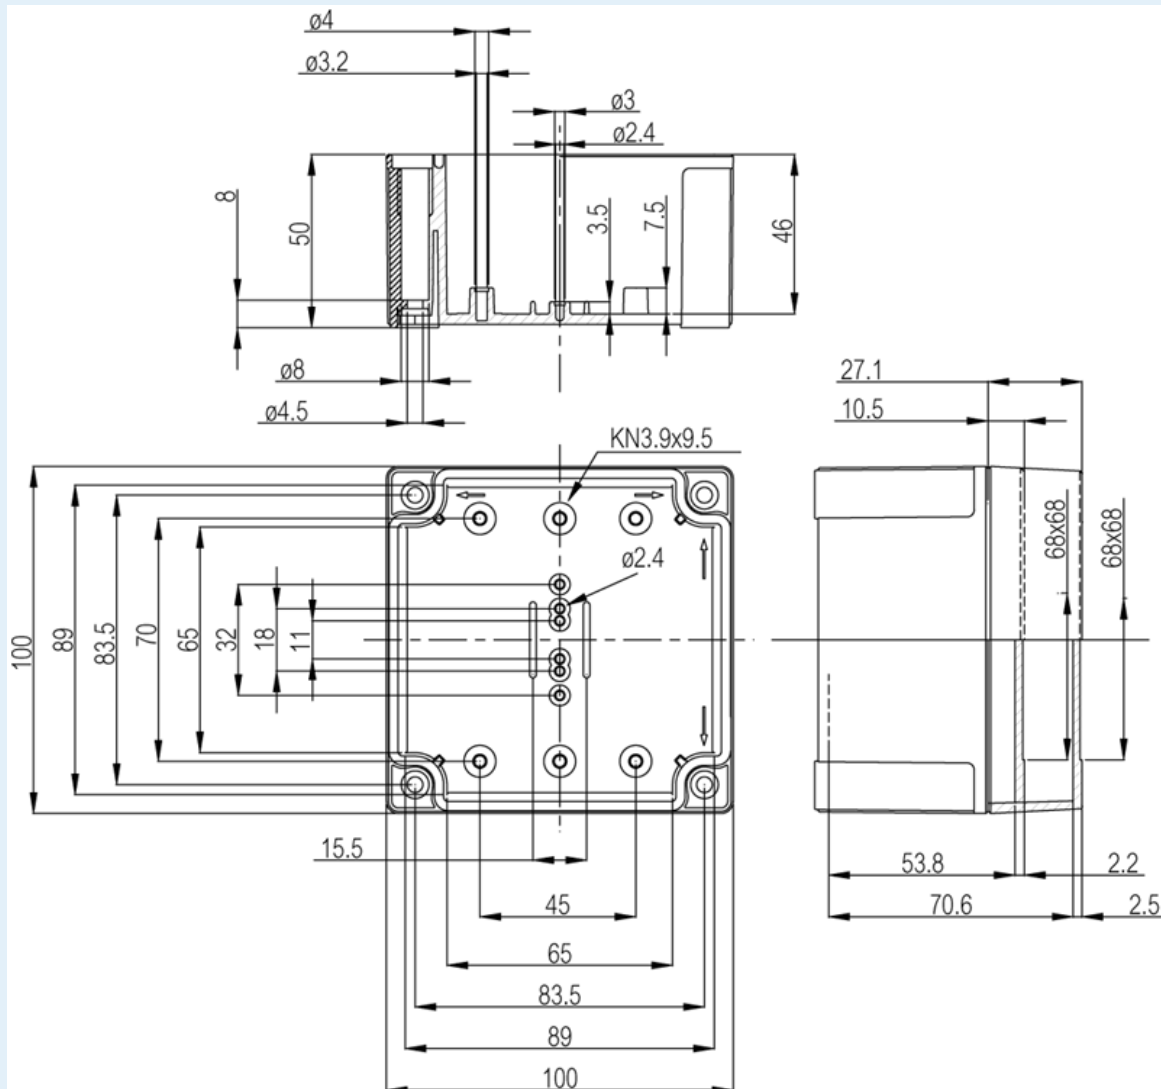

| Dimensions : | Height | Width | Depth |
|--------------|--------|-------|-------|
| mm :         | 100    | 100   | 60    |
| inch :       | 3.94   | 3.94  | 2.36  |

| Materials :       |                      |
|-------------------|----------------------|
| Material :        | Polycarbonate        |
| Base colour :     | RAL_7035             |
| Cover colour :    | RAL 7035 -light grey |
| Gasket material : | Polyurethane         |

| Temperatures :                |             |
|-------------------------------|-------------|
| Temperature °C (continuous) : | -40 ... 80  |
| Temperature °F (continuous) : | -40 ... 175 |

| Accessories : |                                                                     |
|---------------|---------------------------------------------------------------------|
| MIN 8         | DIN-15 Mounting rail, for enclosures:                               |
| B-3           | DIN-35 Mounting rail, for enclosures:<br>(80 x 35 x 1)              |
| FP 22046      | Wall fastening lug (4 pcs)                                          |
| MIV 95        | Mounting plate (Galvanized steel), for enclosures:<br>(66 x 80 x 1) |

| Ratings :                               |                   |
|-----------------------------------------|-------------------|
| Ingress protection (EN 60529):          | IP66; IP67;       |
| Impact Resistance (EN 62262):           | IK08;             |
| electrical_insulation :                 | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes               |
| UV resistance :                         | UL 746C           |
| Flammability Rating :                   | UL 94 V0          |
| Glow Wire Test (IEC 695-2-1) °C :       | 960C              |

| Certificates :       |
|----------------------|
| Certificate FI 40847 |