

This document must be retained for future reference.


It is the responsibility of the person installing the electrical equipment to ensure that the installation meets the requirements of the IET wiring regulations and is therefore 'fit for purpose'. Factors such as correct selection of components, cable sizing, protective devices and Earth bonding are all critical and should be checked prior to full testing and power-up. Any other regulations applicable to the equipment being installed such as the Machinery Directive and current health and safety legislation must also be adhered to.

All connections (including factory made) must be checked for the correct tightness prior to commissioning of the electrical installation.
All connections should also be inspected periodically to ensure correct tightness.

DO NOT USE POWER TOOLS ON THESE PRODUCTS



IP67 Weather Proof In-line Industrial Sockets
16-32A

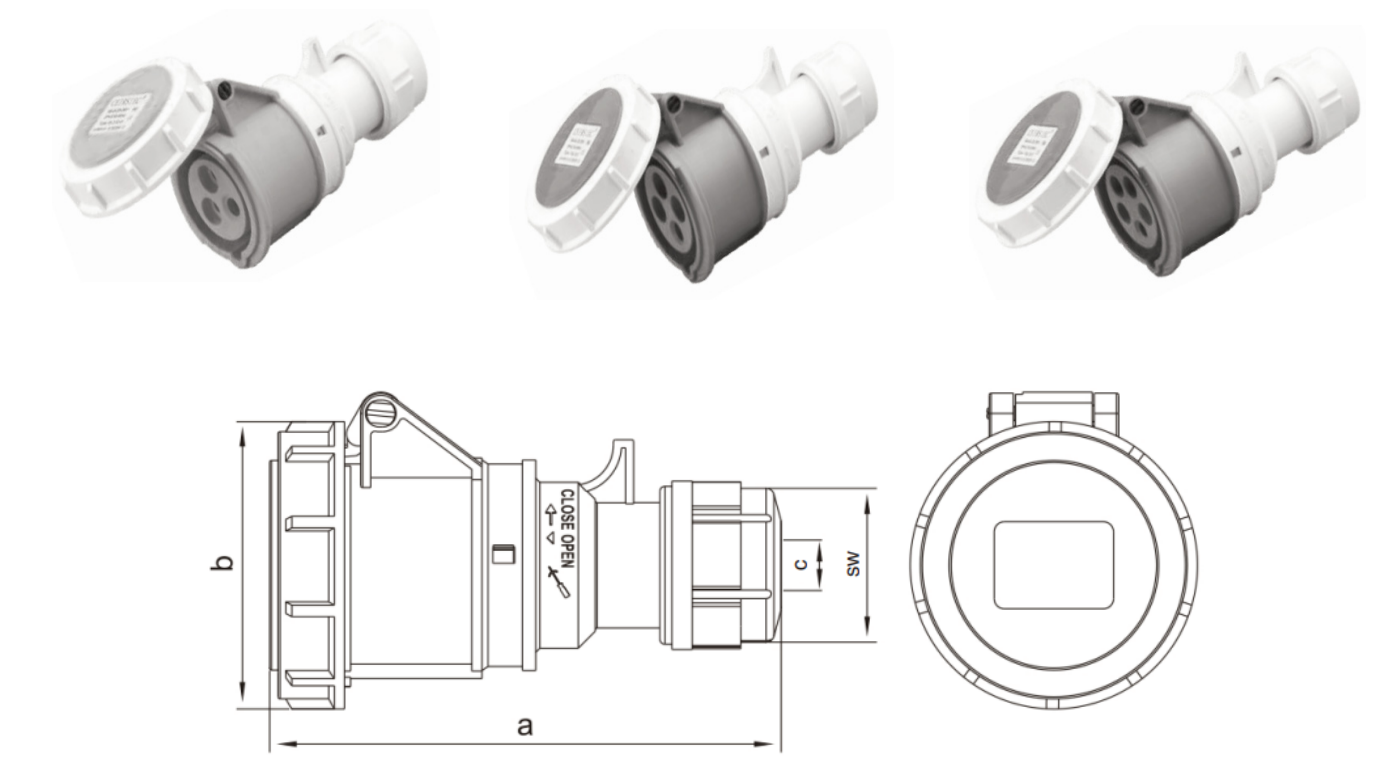

Part Number	Amps	Colour and Voltage	Poles	Protection Degree	a (mm)	b (mm)	c (mm)	sw (mm)	Cable Nominal Cross Section Area
ISW165N	16A	Red 415V	3P + N + E	IP67	141	87	8-16	42	1 - 2.5
ISW325N	32A				165	99	12-22	50	2.5 - 6
ISW163F	16A	Yellow 110V	2P + E		130	71	6-15	38	1 - 2.5
ISW323F	32A				160	92.5	10-20	50	2.5 - 6
ISW163P	16A	Blue 230V	2P + E		130	71	6-15	38	1 - 2.5
ISW323P	32A				160	92.5	10-20	50	2.5 - 6
ISW164N	16A	Red 415V	3P + E		135	79	6-15	38	1 - 2.5
ISW324N	32A				160	92.5	10-20	50	2.5 - 6